



## Powerful Dual Band 900+2600MHz RF Repeater



### OVERVIEW

ATNJ RF repeater with industrial design, combines multi mobile network signals together and improves the mobile voice and data communication, aiming to provide a more cost-effective solution for signal. ATNJ RF repeater is easy to install and maintain, which could help signal providers get fast solution.

A repeater is working as a relay between the BTS and mobiles. It picks up the strongest signal from BTS via the Donor Antenna, linearly amplifies the signal and then re-transmits it via the Indoor Signal Distribution System to the weak/blind coverage area. And the mobile signal is also amplified and re-transmitted to the BTS via the opposite direction.


### FEATURES

- Improve any two mobile networks at the same time
- LCD display the input/output signal strength
- Auto isolation detect function
- Auto gain control
- Auto level control
- Auto uplink noise reduction, avoid disturbing to BTS
- Smart LCD to guide the installation
- Golden color metal industrial design

### WHERE TO USE

- Indoor: Hotels, Exhibition Centers, Basement, Parking Lots, Shopping Malls, Apartments..
- Outdoor: Airport, Tunnel, Village, Mining Area, Court, Tourism Area..

# APPLICATION SCENE

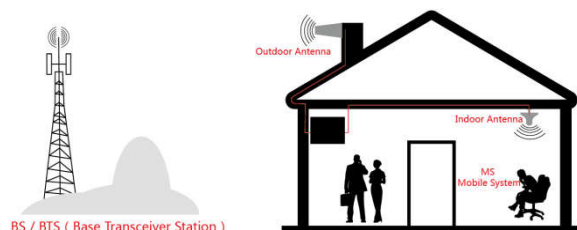

## Technical Specification

SPECIFICATIONS		PARAMETERS	
Frequency Range		GSM 900	890-915MHz/935-960MHz
		LTE 2600	2500-2570MHz/2620-2690MHz
Band Width		GSM 900	25MHz
		LTE 2600	70MHz
Gain		GSM 900	68 ± 3dBm
		LTE 2600	75 ± 3dBm
Automatic Gain Control		31dB	
MGC (Step Attenuation)		31dB@ 1dB/Step	
Output Power		GSM 900	17 ± 3dBm
		LTE 2600	24 ± 3dBm
Spurious Emission	9 kHz -150 kHz/1kHz	≤-36dBm	
	150 kHz - 30 MHz/10kHz	≤-36dBm	
	30 MHz - 1 GHz/100kHz	≤-36dBm	
	1 GHz- 12.75 GHz/1MHz	≤-30dBm	
ACPR		Uplink Fully comply with 3GPP 36.106	
		Downlink Fully comply with 3GPP 36.106	
Unwanted emissions		Fully comply with 3GPP 36.106	
VSWR		≤2	
Ripple	LTE 800	≤6dB	
	GSM 900	≤6dB	
	LTE 2600	≤6dB	
Noise Figure		≤8dB	
Delay		≤1 μ s	

I/O Impedance	50 $\Omega$
RF Connector	N-Type (Female)
Operating Temperature	-25°~+55°
Power Supply	DC 24V
Power consumption	$\leq 75W$
Environment Conditions	IP43
Humidity	$\leq 90\%$
Weight	4.55kg
Size	274*265*58mm